

Fecha:

Cliente:

Proyecto:



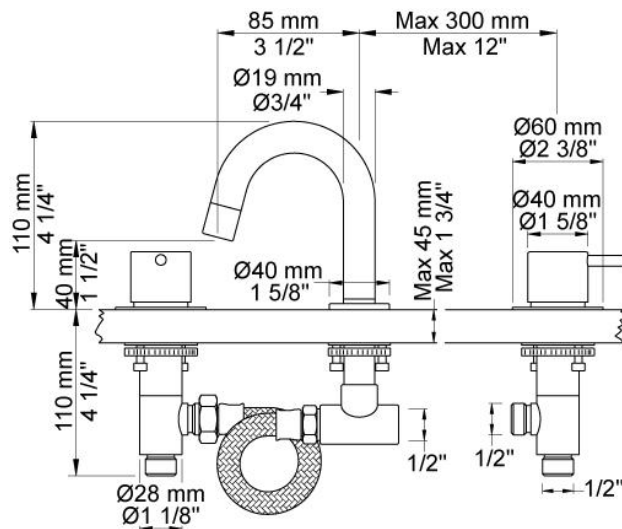
**HV5**

Mezclador doble mando compuesto por: Válvulas de paso S50D + S50DH, caño giratorio 090A con aireador para el ahorro de agua, 2 arandelas de 60 mm 001G. Altura de 110 mm. Entrada / Salida: ½". Orificio mezclador: 30 mm. Orificio caño: 22 mm.

**Flujo**

|                   | Bar:    | 1,0 | 2,0 | 3,0 | 4,0 | 5,0 |
|-------------------|---------|-----|-----|-----|-----|-----|
| HV5 <sup>1)</sup> | (l/min) | 2,3 | 3,3 | 4,0 | 4,0 | 4,0 |
| HV5               | (l/min) | 4,8 | 6,8 | 8,3 | 8,3 | 8,3 |

<sup>1)</sup> USA Standard

**Disponible en colores**

|                    |                            |
|--------------------|----------------------------|
| 02 Gris            | 25 Rosa                    |
| 04 Azul claro      | 27 Negro mate              |
| 05 Naranja         | 28 Blanco mate             |
| 06 Verde claro     | 60 Negro                   |
| 08 Amarillo        | 61 Negro cepillado         |
| 09 Gris oscuro     | 62 Negro profundo          |
| 12 Mocca           | 63 Cobre                   |
| 14 Rojo brillante  | 64 Cobre cepillado         |
| 15 Azul oscuro     | 65 Oro                     |
| 17 Negro gloss     | 70 Oro cepillado           |
| 18 Blanco          | Acero inoxidable cepillado |
| 19 Latón natural   | Color 68, Plata            |
| 20 Cromo cepillado | Cromo                      |
| 21 Rojo carmin     |                            |



Technical drawing of the U-bolter assembly with dimensions:

- Overall height: 110 mm (4 1/4")
- Top flange width: 85 mm (3 1/2")
- Top flange thickness: 40 mm (1 1/2")
- Top flange outer diameter: Ø19 mm (Ø3/4")
- Top flange inner diameter: Ø40 mm (Ø1 5/8")
- Maximum height of the U-bolter: Max 55 mm (Max 2 1/8")
- Maximum height of the base plate: Max 65 mm (Max 2 1/2")
- Base plate thickness: 1/2"
- Drill bit dimensions: Ø22 mm / Ø7/8"

