

VOLA NR.41
VOLA VR512
VOLA 4002/L/V, 4003



Do not cut the membrane
Die Membran nicht schneiden
Skær ikke membranen
Skär inte membranet
Snij het membraan niet door
Ne coupez pas la membrane
No cortar la membrana

NR.41:

1

VR512:
4002/L/V:
4003:

2

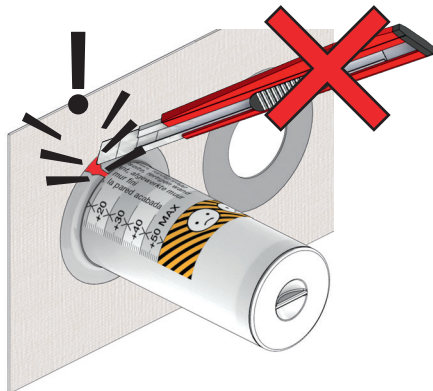

www.vola.com


vola

mnt_NR41_40998512_V1




©VOLA A/S 5 705230 296593


NR 41



NR 41 - 1


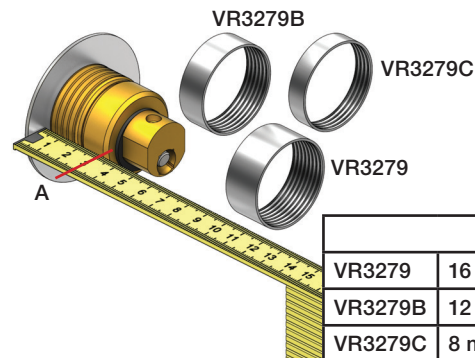


NR 41 - 2




VR512
4002L

4002V
4003

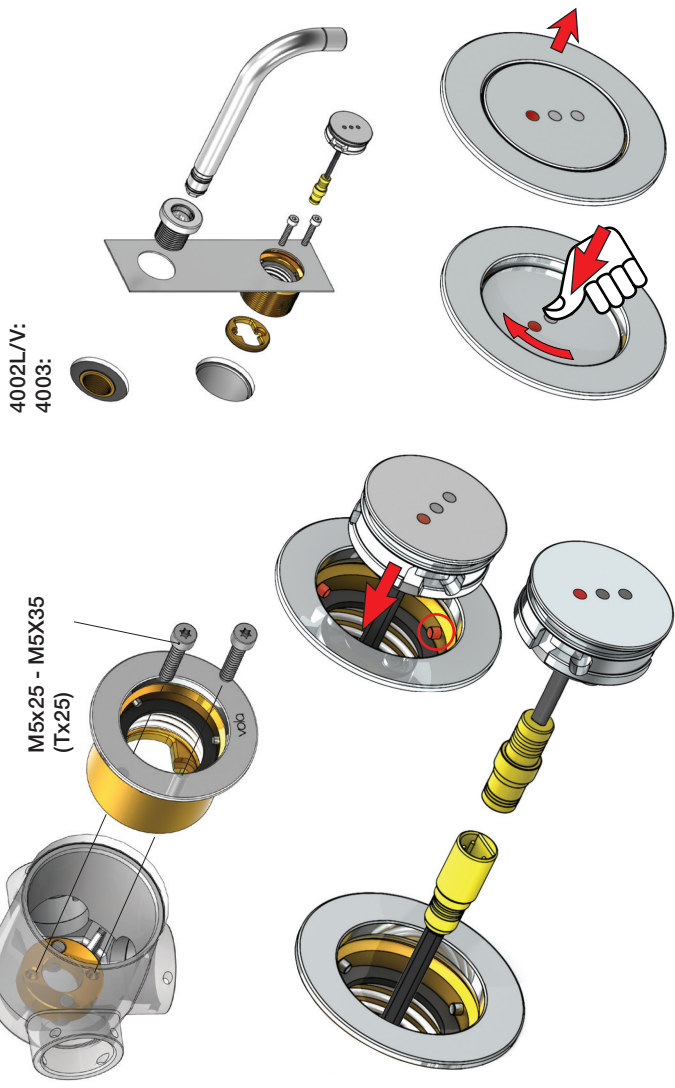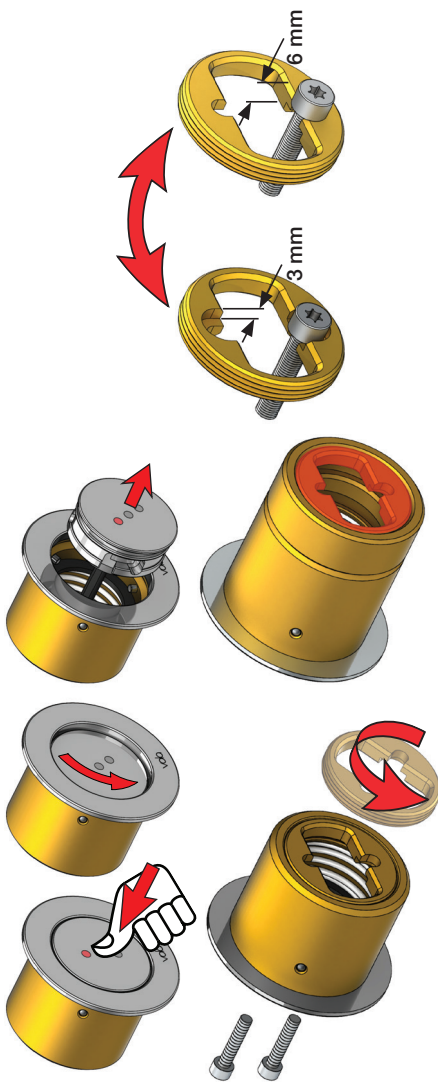

4002L/V:
4003:

M5x25 - M5X35
(Tx25)

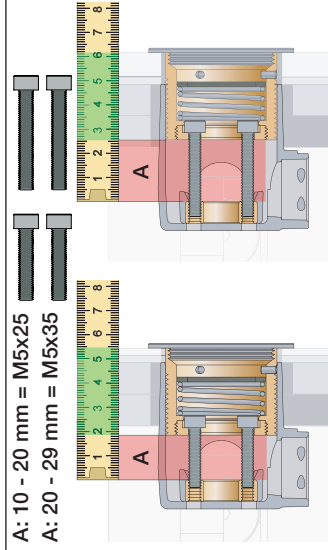


A: 10 - 20 mm = M5x25
A: 20 - 29 mm = M5x35

VR513A:		Standard		
Tiles: Fliesen: Fliser: Fliser: Tegels: Carreaux:	3 - 15 mm	15 - 25 mm	x1	
	15 - 25 mm	25 - 35 mm		x2
	25 - 35 mm	35 - 45 mm		x3
	35 - 45 mm	45 - 55 mm		
	45 - 55 mm	55 - 65 mm		



04/00305 - 4300+4800
04/00302 - 4900





www.vola.com

mmt_4900_V3_40998511
27-11-2023






5 705230 292519

	L	L1	L2	H	H1	D
4300	377 mm 14 3/4"	260 mm 10"	268 mm 10 1/2"	95 mm 3 3/4"	186 mm 7 3/8"	70 mm 2 3/4"
4800	475 mm 19 1/2"	355 mm 14"	367 mm 14 1/2"			
4900	552 mm 23"	435 mm 17"	447 mm 17 5/8"			
4900VS, 4900VSX	377 mm 14 3/4"	260 mm 10"	268 mm 10 1/2"	214 mm 8 1/4"		

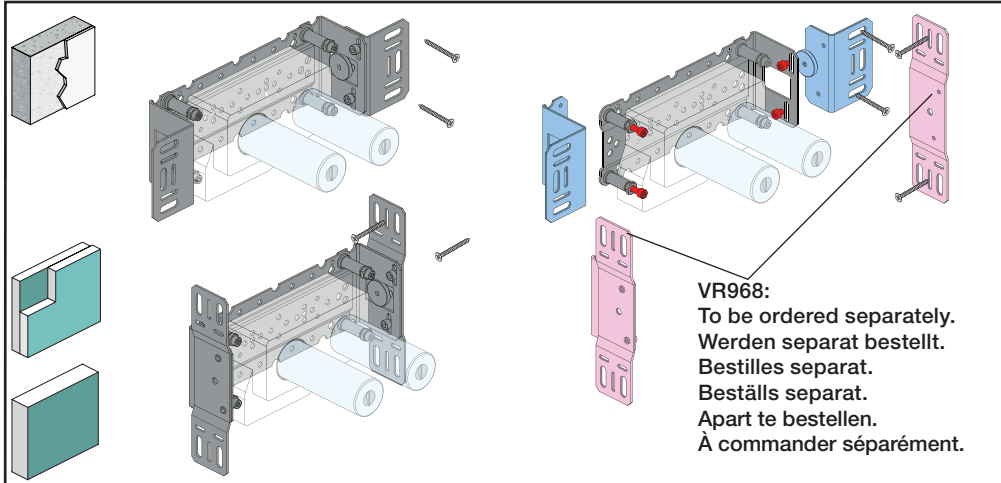
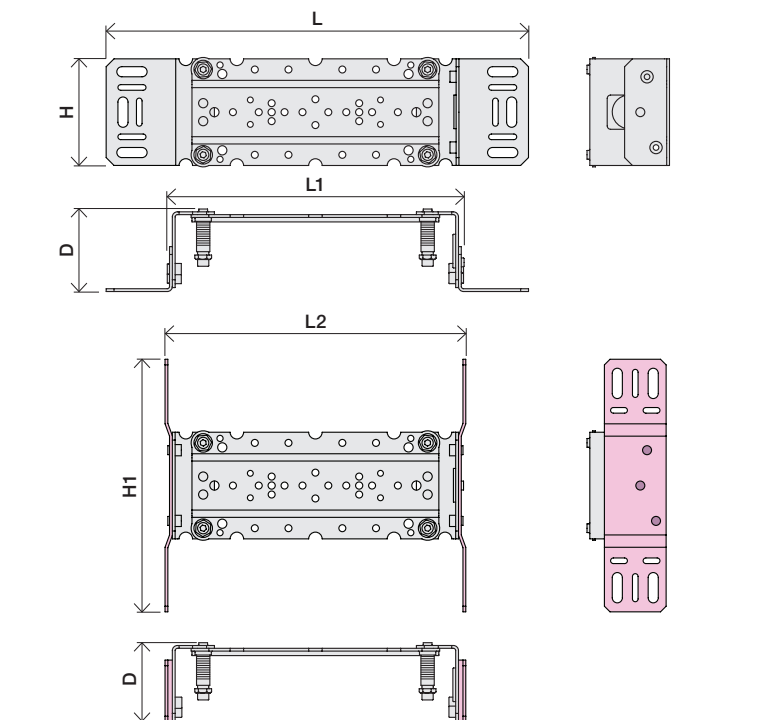


VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Beställs separat.
Apart te bestellen.
À commander séparément.

A	Data, 3 Bar/43.5 Psi:	
	l/min. Gal/min.	Max. 65°C, 150°F
4300:	30.0 7.9	
4800:	30.0 7.9	
4900:	18.3 4.8	Max.: 10 Bar/145 psi

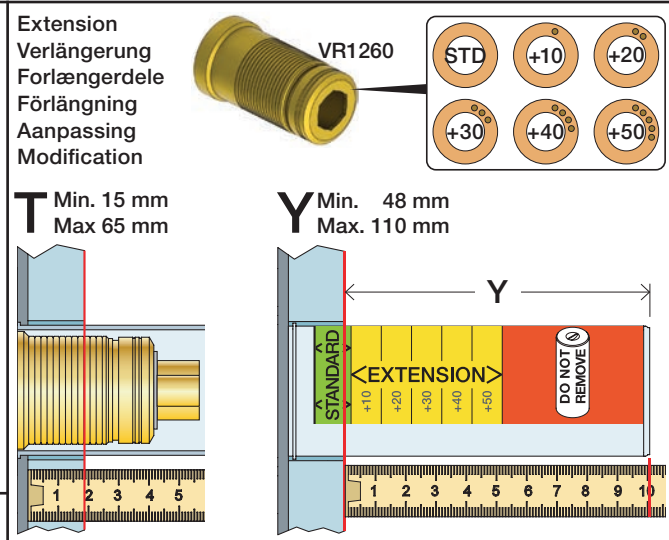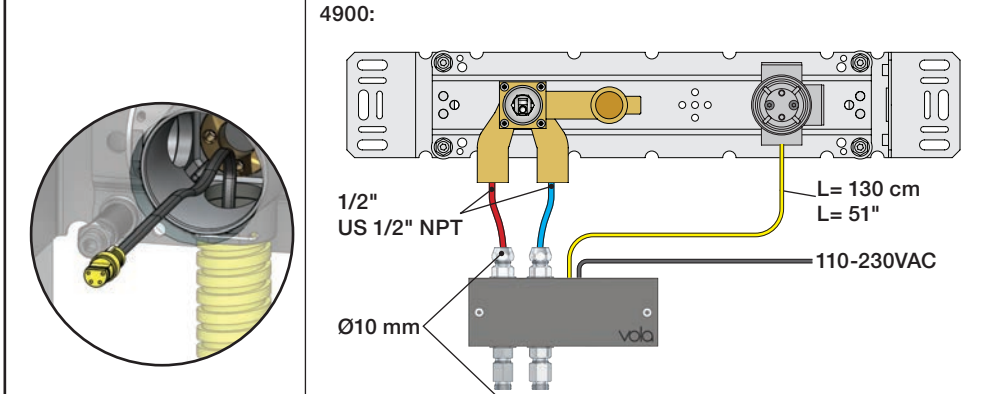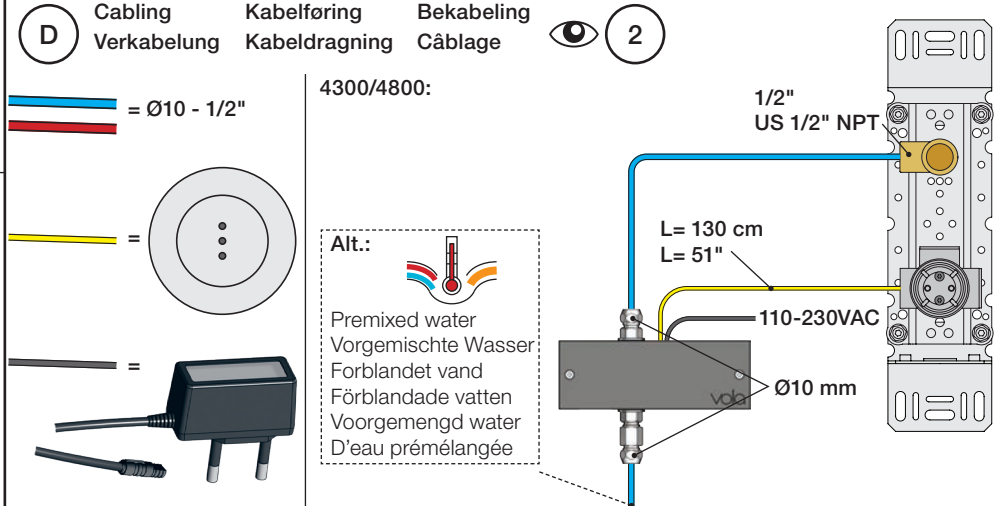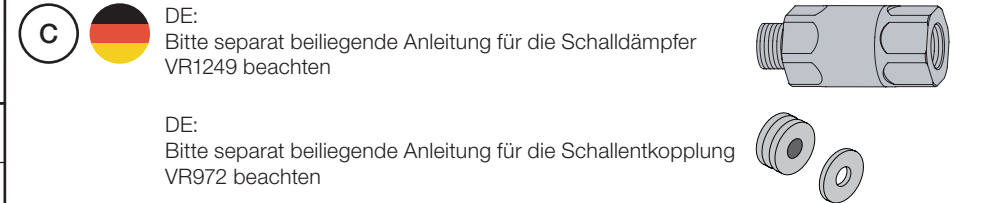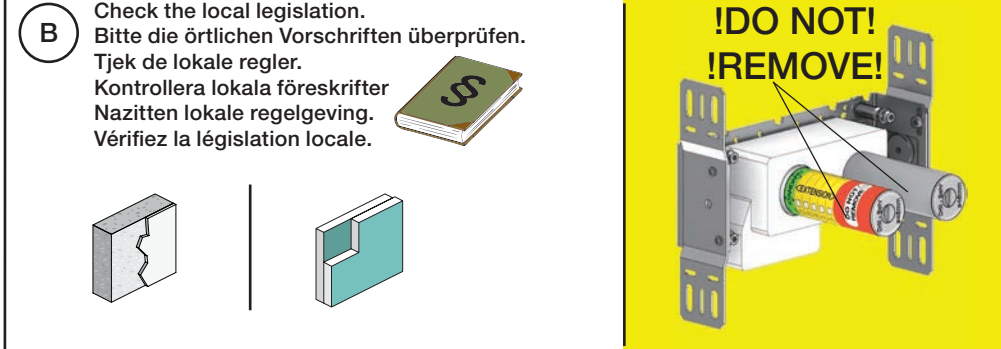







	T	Y	VR1260/VR2019	VR513A
	3 - 15 mm	110 - 98 mm	Std.	Std.
	15 - 25 mm	98 - 88 mm	+10	x1
	25 - 35 mm	88 - 78 mm	+20	
	35 - 45 mm	78 - 68 mm	+30	x2
	45 - 55 mm	68 - 58 mm	+40	
	55 - 65 mm	58 - 48 mm	+50	x3

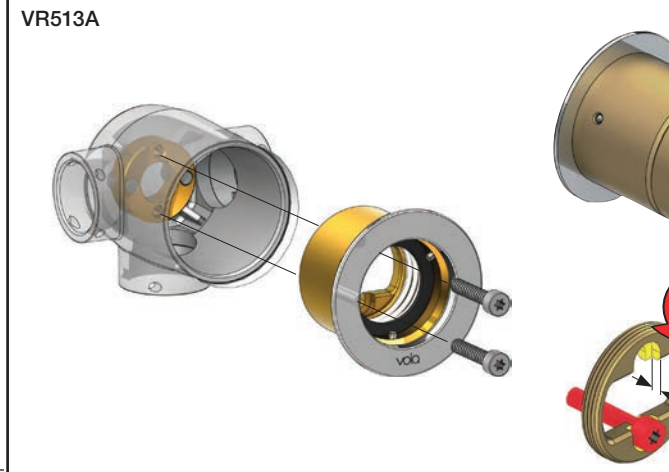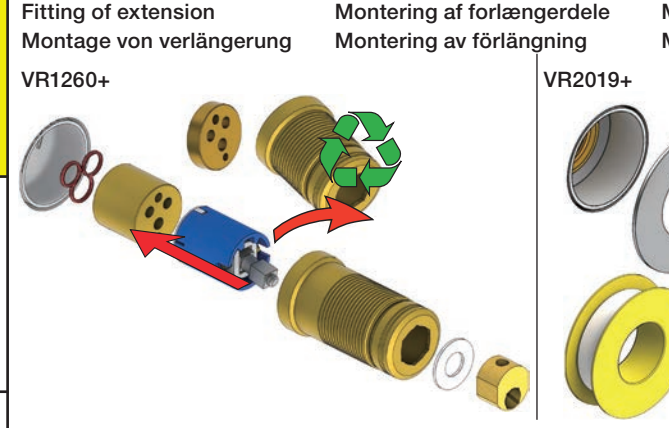

Box till inbygggnadsblandare.
Boks til indbygningsblander.
Laatikko seinäasenteiselle sekoittajalle.

Ingår inte i leveransen, köps separat.
Ikke inkludert, kjøpes separat.
Eivät sisälly tilaukseen, ostettava erikseen.

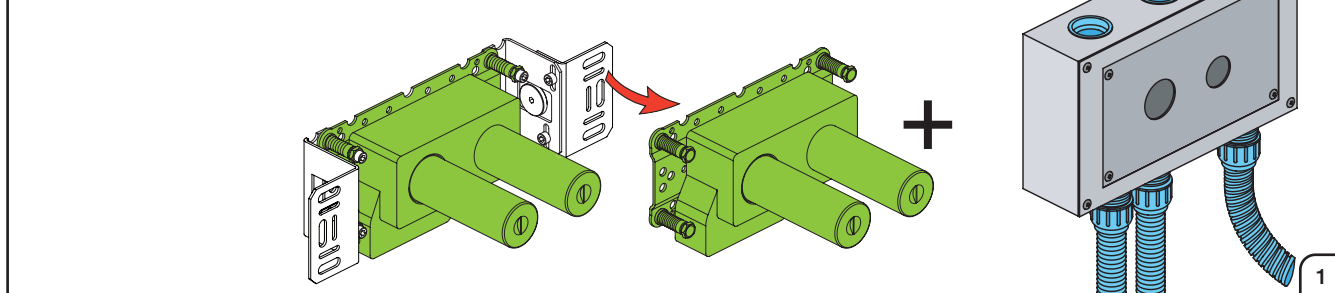



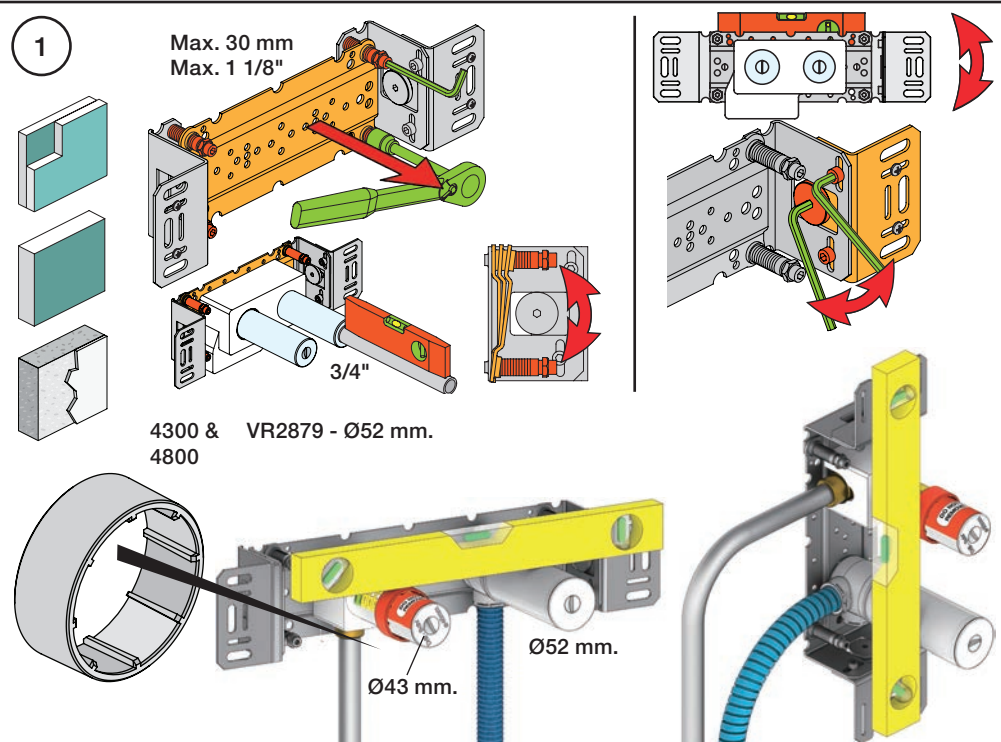
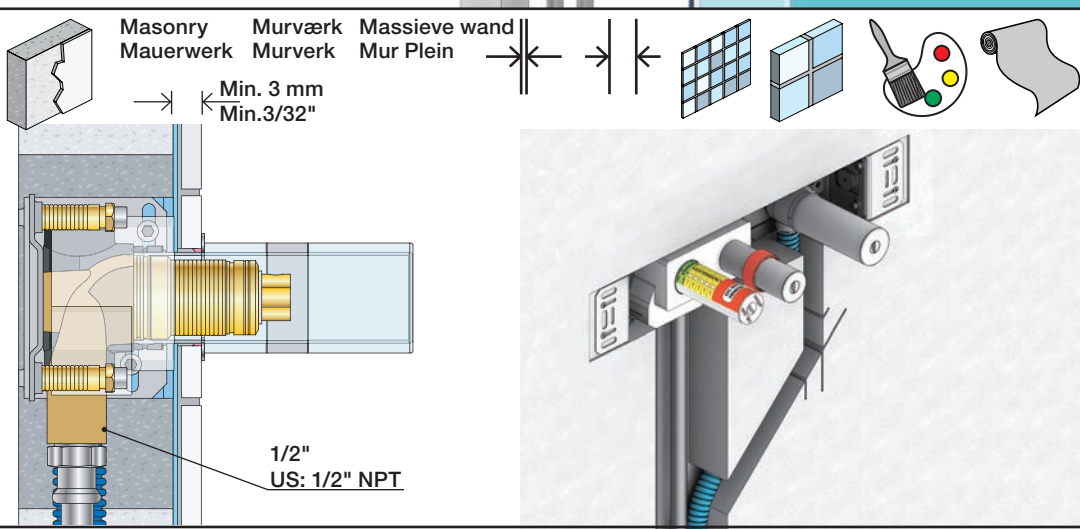
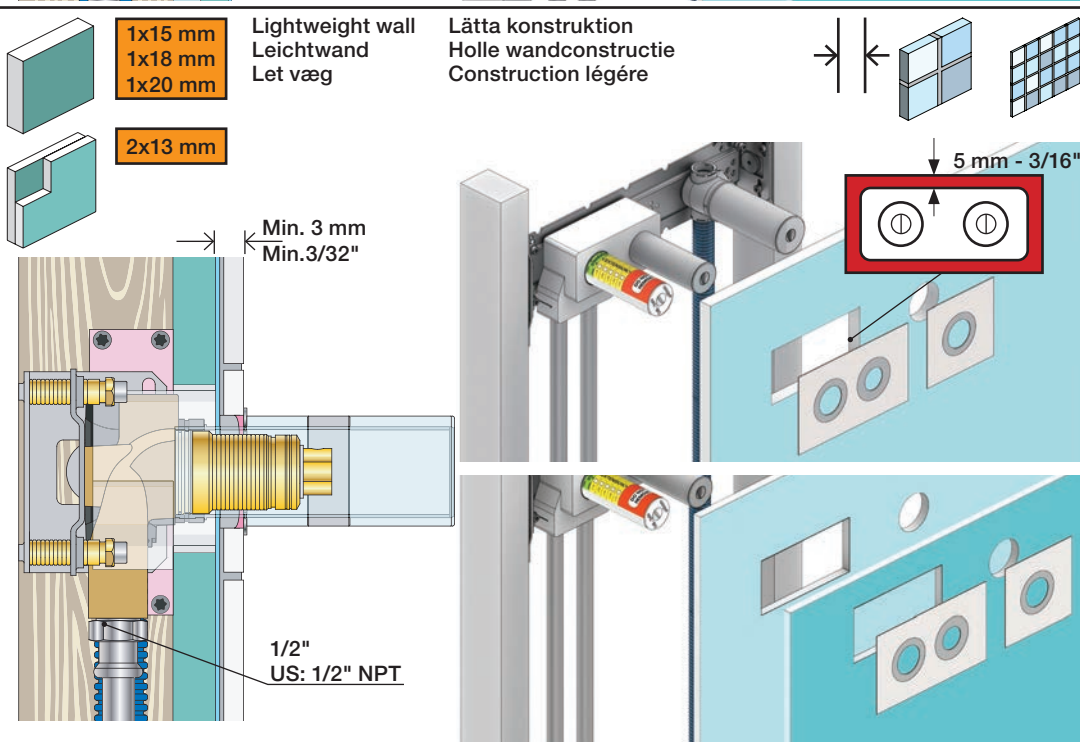
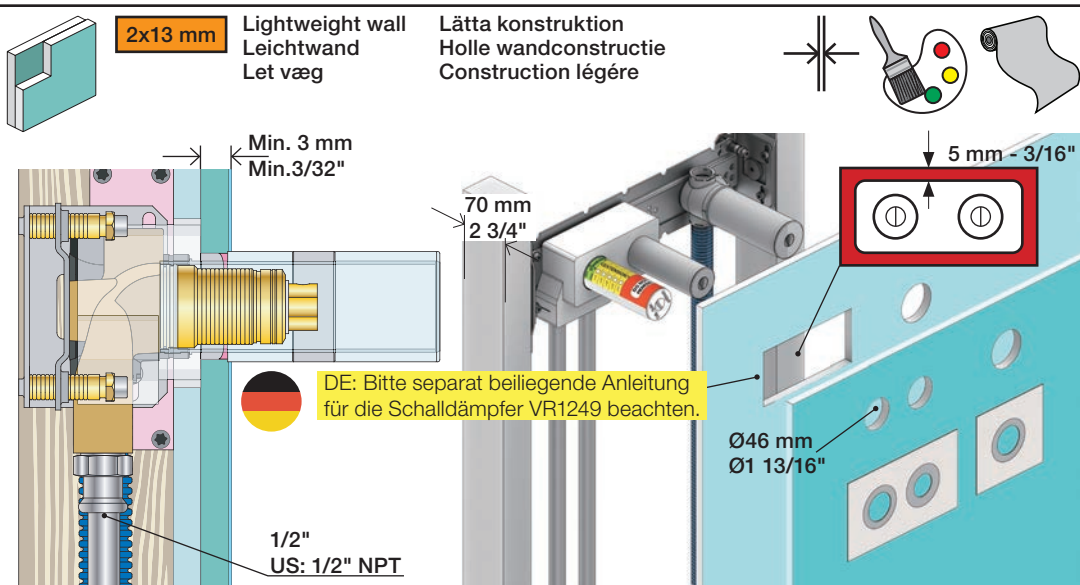
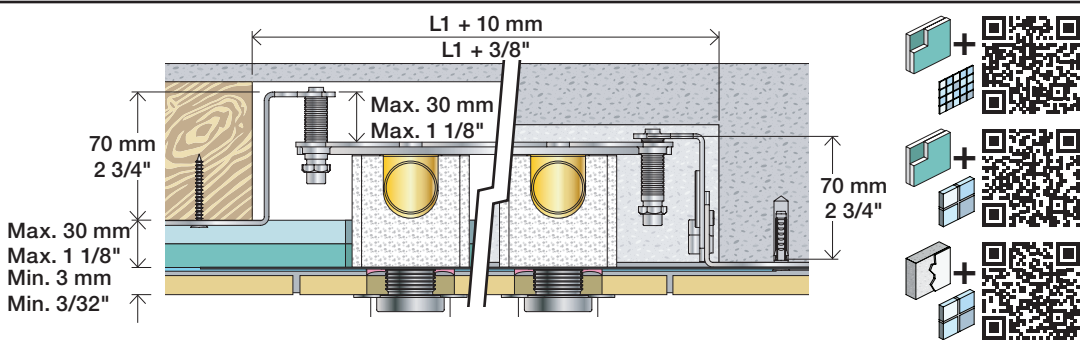


2

Test Pressure
Prüfdruck
testtryk
Test tryck
Test druk
test de pression

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter.
Nazitten lokale regelgeving.
Vérifiez la législation locale.

! Water - Wasser - Vand ! MAX 1 Minute - Minut !
! Vatten - Water - L'eau ! MAX 1 Minuut !

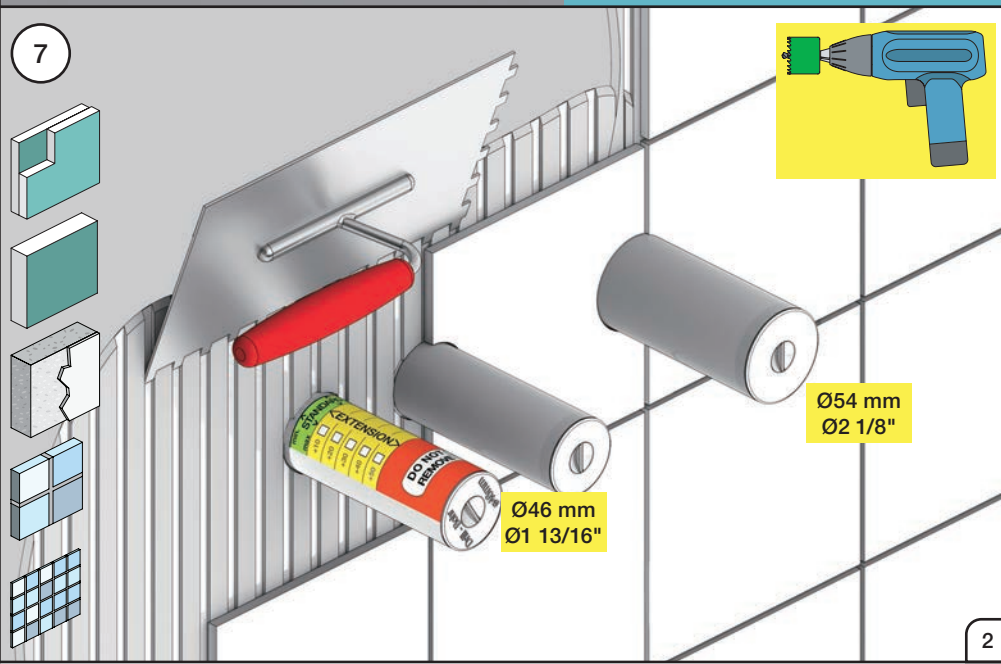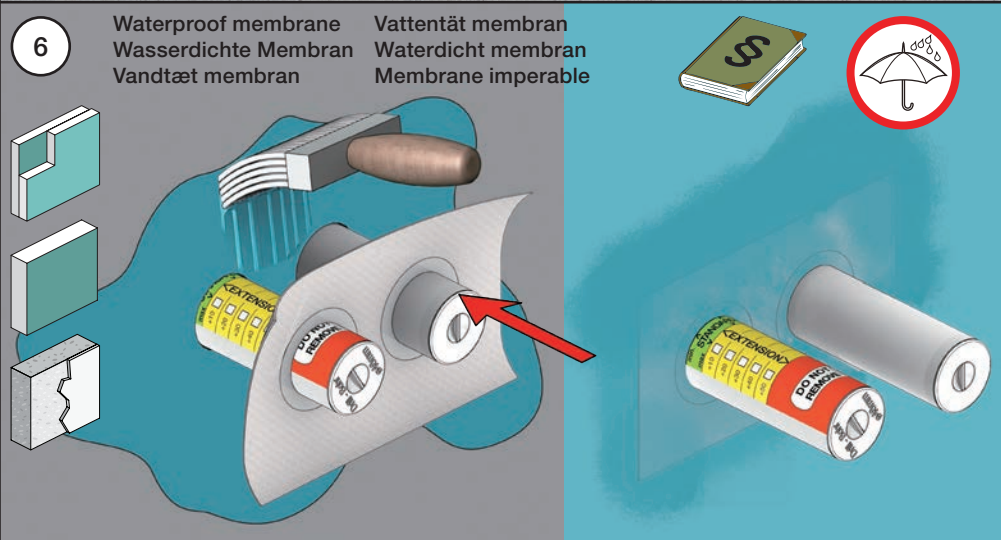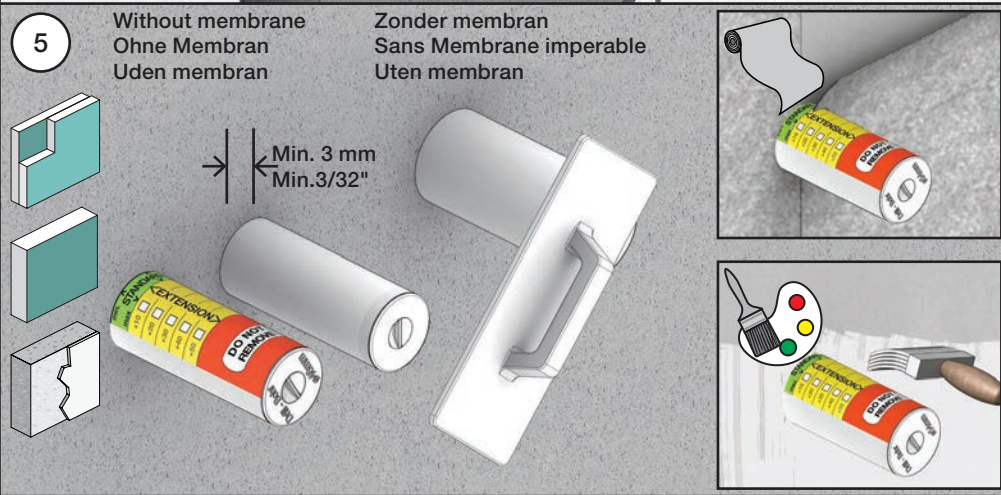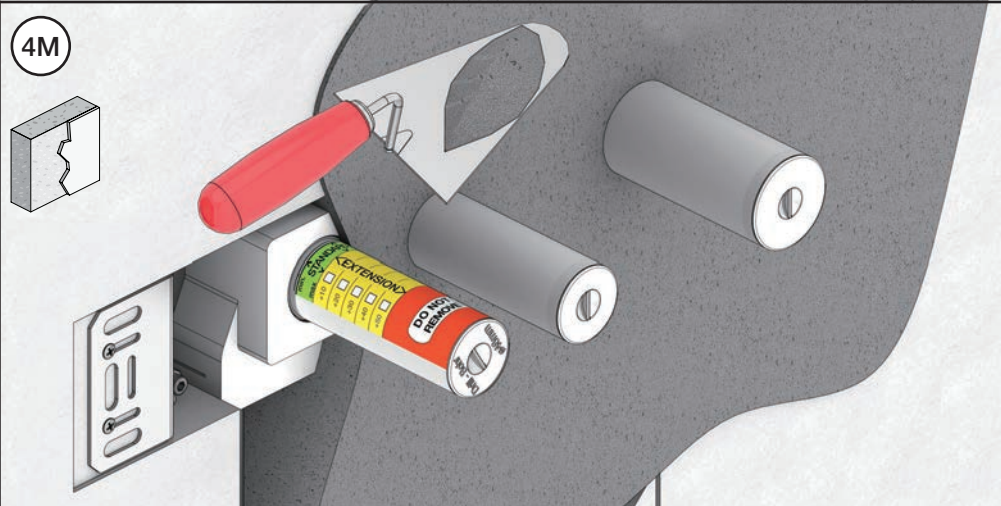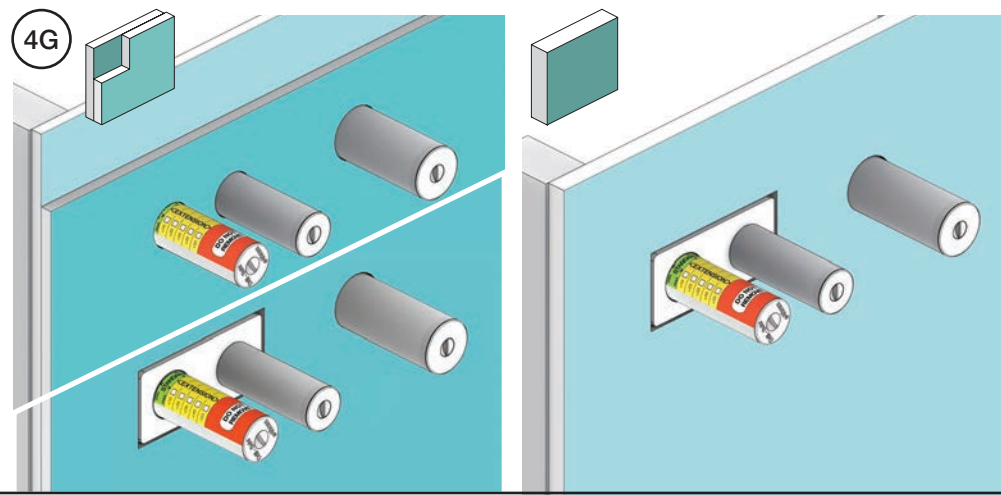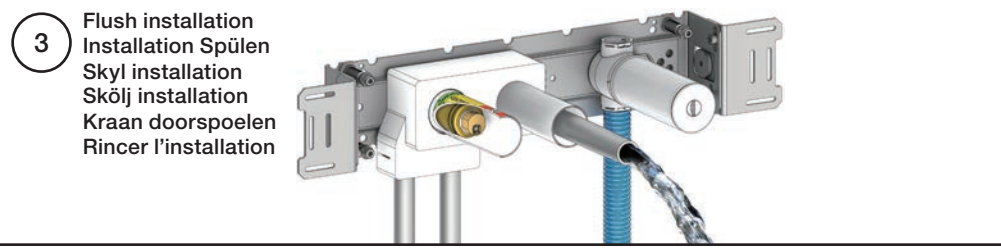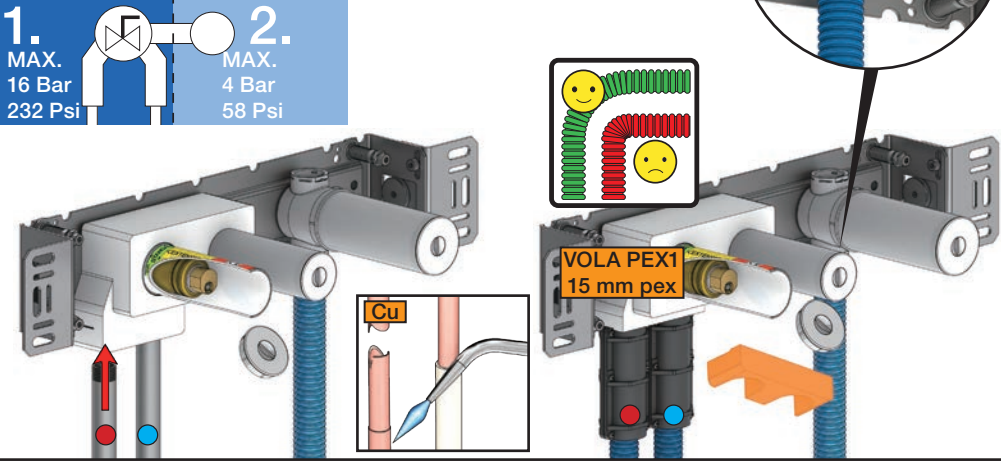

VOLA Electronic

Elektronikboks

Valve box

Ventil Kasten

Ventilbox


Ventiel doos

Boite étanche avec vanne




EU EMC directive
2004/108/EU
IPX4

VR2618



VR2617



www.vola.com

mnt_Elektronikbox_V10_40999840
17-03-2022

© VOLA A/S




vola

Settings: Einstellung:	Setting: Justering:	Afstelling: Réglage:			
	Sec.	1	2	3	4
DEFAULT SETTING:		ON	ON	ON	ON
ON	0	ON	ON	ON	ON = 20 sec. - hygienic rinse every 24h. - hygienische spülung jede 24 stunde. - hygiejneskyl 24t efter sidste brug. - hygienisk skölja varje 24 timmar. - hygiénisch spoelen iedere 24 uur. - Rinçage hygiénique chaque 24h.
OFF	3	ON	OFF	ON	
	5	ON	OFF	OFF	
	8	OFF	ON	ON	
	10	OFF	ON	OFF	
	15	OFF	OFF	ON	
	20	OFF	OFF	OFF	
SPECIAL: Long spout Lange Auslauf Langt udløb Långt utlopp Lange uitloop Long bec	*0	ON	ON	OFF	


installation requirements:
Installationsanforderungen:

Sunlight or light from halogen lamps can shorten the signal range.
Sonnenlicht oder Licht von Halogenlampen können das Signal verkürzen.
Skarpt sollys eller halogenlys, kan forkorte rækkevidden.
Starkt sollys eller halogenbelysning kan förkorta signalen/känsligheten.
Directe lichtinval van de zon of van halogeen lampen kan het signaal verkorten.
La lumière du soleil ou des lampes à halogène peut perturber le fonctionnement du détecteur.




Krav til installation:
Installationskrav:

No mirroring surfaces opposite the sensor.
Keine spiegelnden Flächen vor dem Sensor.
Ingen reflekterende overflader modsat sensoren.
Inga speglade ytor motsatta sensorn.
Geen spiegelen oppervlakken tegenover de sensor.
Pas de surfaces réfléchissantes opposées du capteur.



Adapter/ Adapteur VR2624 & VR2636

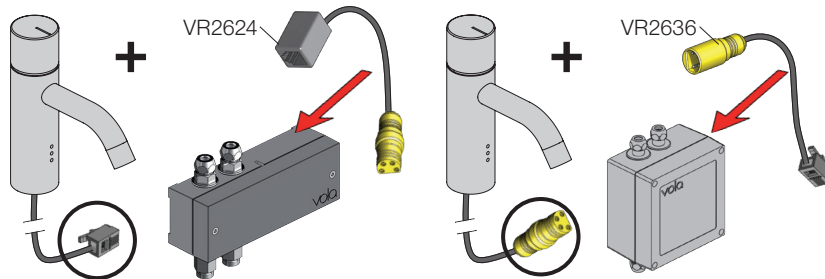

DC Power supply
DC Stromversorgung
DC Nätaggregat

DC strømforsyning
DC Nätaggregat

DC voeding
Alimentation électrique

VR2622: ROW & GB 110 - 230V~/50-60Hz
VR2626: EU 9V~/300 mA
VR2623, IPX5: 100 - 240V~/50-60Hz/130mA
9V~/660 mA

VR2622/VR2626: 2 m
VR2623, IP64: 1 m


VR2622-VR2623-VR2626
VR2624-VR2636:
To be ordered separately
Separat bestillen
Bestilles særskilt
Beställas separat
Apart te bestellen
À commander séparément

Battery operation
Batteriebetrieb
Batteridrift
Batterij bedrijf
Fonctionnement sur batterie


2 x 1.5V AA - FR6 - FR6

Batteries **MUST** be removed if operated by Power supply.
Batterien **MÜSSEN** bei Stromversorgung entfernt werden.
Batterierne **SKAL** fjernes ved brug af strømforsyning.
Batterier **SKAL** tas bort om der anvendes nätaggregat.
Batterijen **MOETEN** worden verwijderd als ze op netvoeding werken.
Les piles **DOIVENT** être impérativement retirées si on utilise l'alimentation électrique.


VR2618

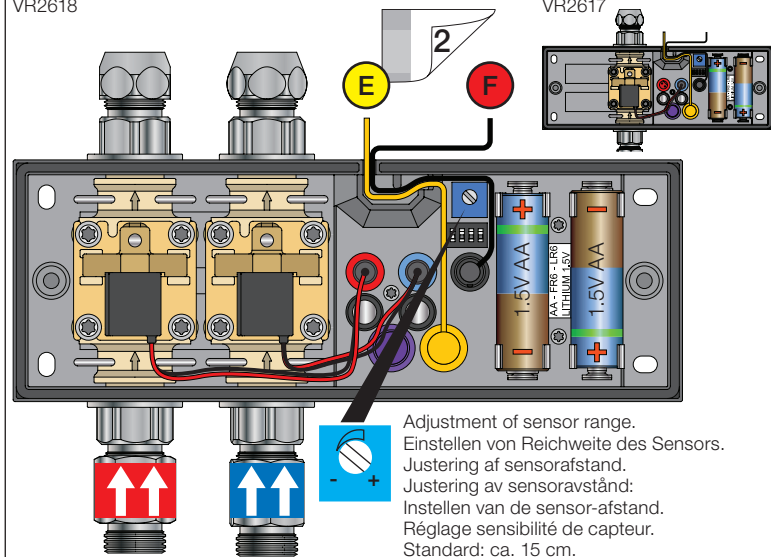

Adjustment of sensor range.
Einstellen von Reichweite des Sensors.
Justering af sensorafstand.
Justering av sensoravstånd:
Instellen van de sensor-afstand.
Réglage sensibilité de capteur.
Standard: ca. 15 cm.

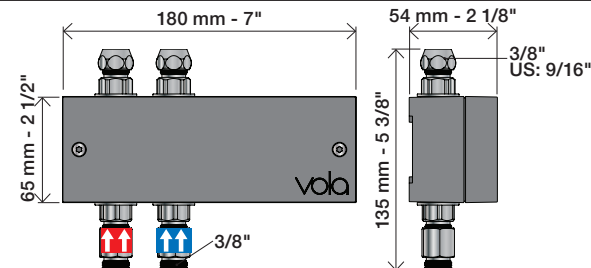

Takmonterad
Plafondmontage
Monté au plafond

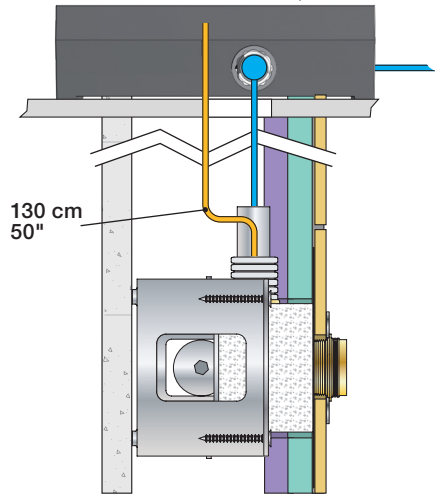

Technical drawing of a wall-mounted gas valve assembly. The assembly consists of a gas control valve (top) and a gas solenoid valve (bottom). The gas control valve is mounted on a wall and has a gas inlet on the left and a gas outlet on the right. The gas solenoid valve is mounted on a wall and has a gas inlet on the left and a gas outlet on the right. The gas control valve is connected to the gas solenoid valve via a gas line. The drawing shows the internal components of the gas control valve, including the gas inlet valve, the gas control valve, and the gas outlet valve. The gas solenoid valve is shown in a cross-section view, revealing the internal solenoid coil and the gas inlet and outlet ports. The drawing is labeled with dimensions and technical specifications.


Diagram illustrating the cable tray installation. The tray is shown with various components, including a 1/2" US 1/2" NPT fitting and a cable entry point. The cable length is specified as L = 130 cm and L = 51".

L= 70 cm
L= 27"

D Cu + Flex, Nut/Ferrule, 9/16".
VR584 + VR585


1

2

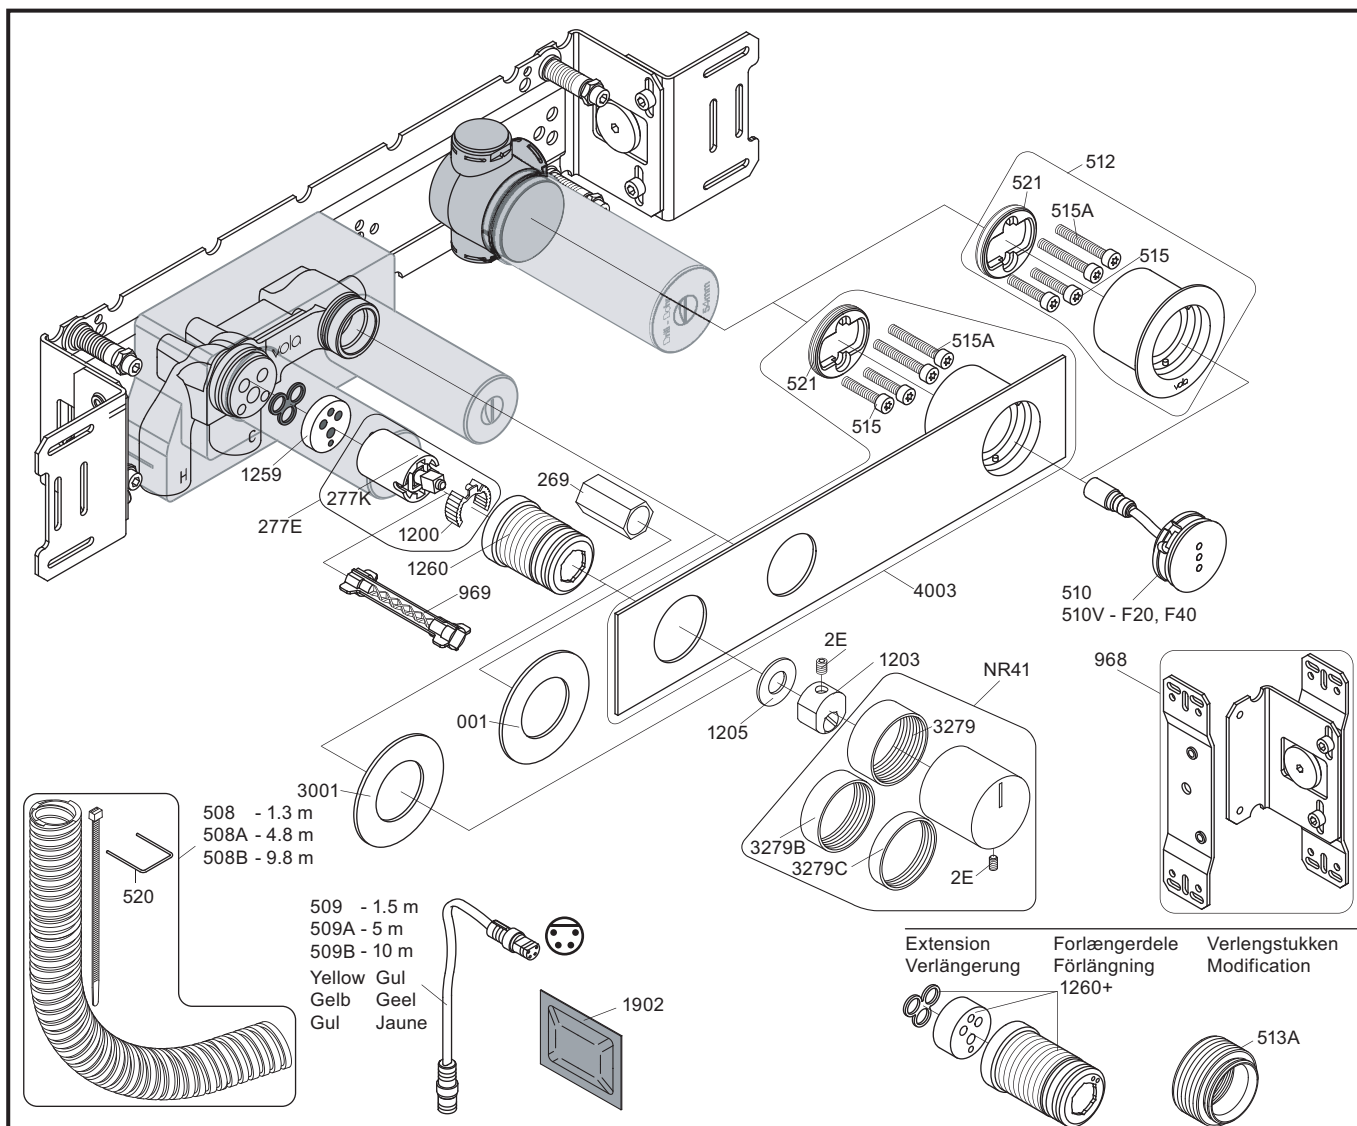

NR12A: VR2E, VR1202A
 VR277E: VR277, VR1200
 VR512: 2xVR515, 2xVR515A, VR521
 VR4003: 2xVR515, 2xVR515A, VR521

4900 2927 2934	4900VS, 4900VSX 2927 2934
4003	-
3001, 001, 512	3001, 001, 512




vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA 4900
 4900VS, 4900VSX

Date
 Apr. 21

Rev.
 2

Sheet
 SB 40.49

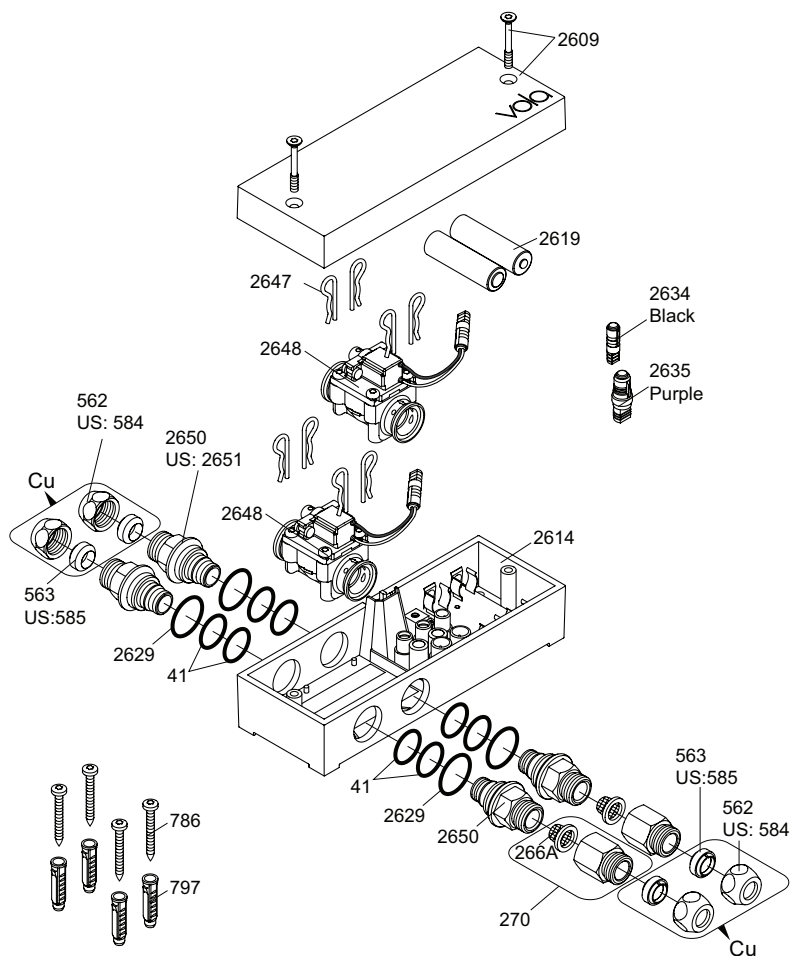

VR2650: 2xVR41, VR2652, VR2629
 VR2651: 2xVR41, VR2652, VR2629 (USA)
 VR2654: 4xVR2647, VR2648, 2xVR2650, 2xVR266A

Additional parts **Zusätzliche Teile** **Supplernde dele** **Ytterligere delar**

Extra onderdelen **Pièces supplémentaires** **Las piezas adicionales**

Remote control
 Fernbedienung
 Fjernbetjening
 Fjärrkontroll

Afstandsbediening
 Contrôle à distance
 Telemando

2625




Power supply
 Netzteil
 Strømforsyning
 Strömförsörjning

Stroomvoorziening
 Alimentation
 Convertidor adaptador



2622: ROW&GB
 2626: EU

	EU	GB	US	AUS
Type:	C	G	A	I



2623: IPX5

Extension

2639 - 5 m
 2645 - 10 m



Black
 Schwartz
 Sort

Svart
 Zwart
 Noir

Signal cable
 Signalkabel

Signaalkabel
 Câble de signal
 Cable de señal




41XX, 49XX:

509 - 1.5 m
 509A - 5 m
 509B - 10 m



Yellow
 Gelb
 Gul
 Gul
 Geel
 Jaune




RB1E, HV1E:
 2656 - 1.5 m



247

US: 2601\$

Cu: 221:
 Ø10 mm




L 500 mm

L 500 mm

L 350 mm

Adapter
 Adapteur

Discontinued model
 aufgehörte Modell
 Udgået model
 Avvecklad modell
 Beëindigde model
 Modèle discontinuée




2624
 L 200 mm



RJ10 - 4/4

2636
 L 200 mm

RJ10 - 4/4



vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA VR2618
HV1E/4100/4900

Date:
 Feb. 23

Rev.:
 2

Sheet:
SB21.16