


VOLA 050, 050A, 050K

Fitting instruction  
Montageanleitung  
Monteringsvejledning  
Monteringsvægledning  
Montage hanleiding  
Manuel de montage



| Data             | Bar:      | 1   | 2   | 3   | 4   | 5   |
|------------------|-----------|-----|-----|-----|-----|-----|
| 051              | (l/min)   | 13  | 19  | 23  | 26  | 30  |
| 051A             | (Gal/min) | 3.5 | 5.0 | 6.1 | 7.0 | 7.8 |
| 051K             | (l/min)   | 5   | 5   | 5   | 5   | 5   |
|                  | (Gal/min) | 1.3 | 1.3 | 1.3 | 1.3 | 1.3 |
| Max. 65°C. 150°F |           |     |     |     |     |     |

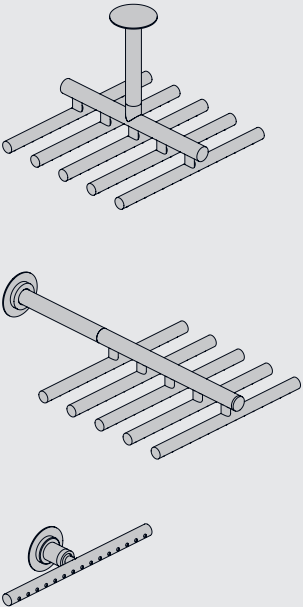

**VR161 - 050, 050A:**  
VR161B: 6 l/min - 1.6 Gal/min  
VR161K: 7 l/min - 1.8 Gal/min  
VR161D: 9 l/min - 2.5 Gal/min  
VR161F: 14 l/min - 3.7 Gal/min



**USA:**  
Max. flow rate:  
1.6 Gal/min.  
6.0 l/min.



VR161B




VR161K




VR161D




VR161F




050

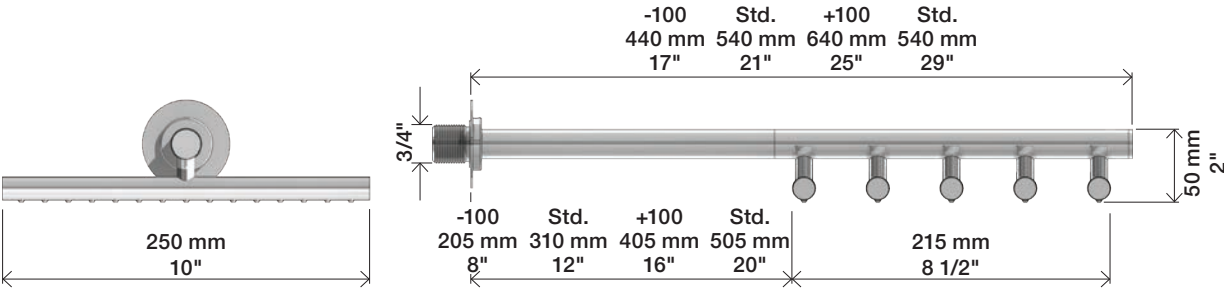


050A




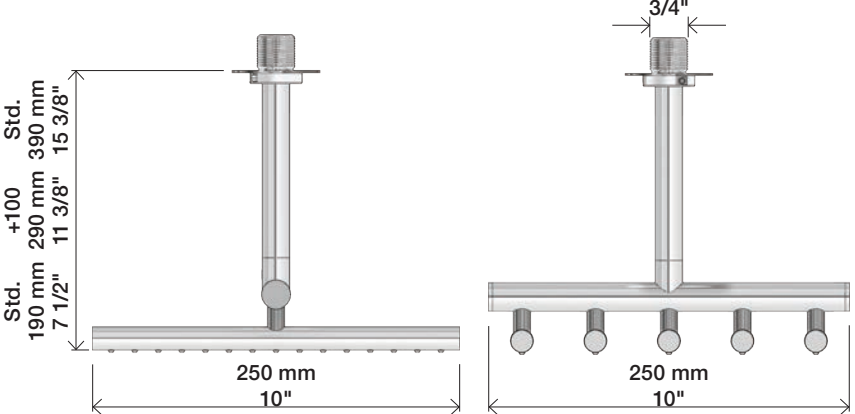


050K

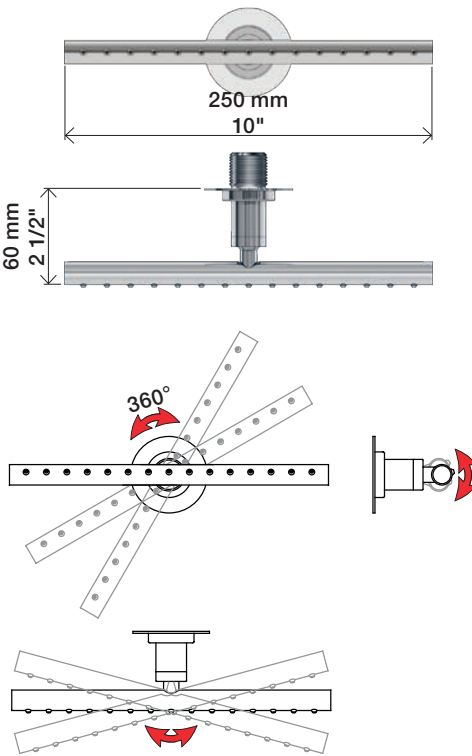



Service - VR556

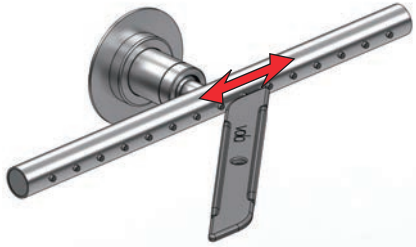

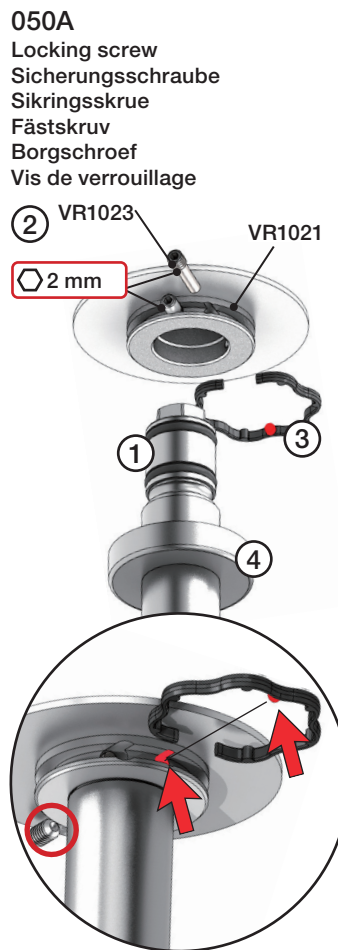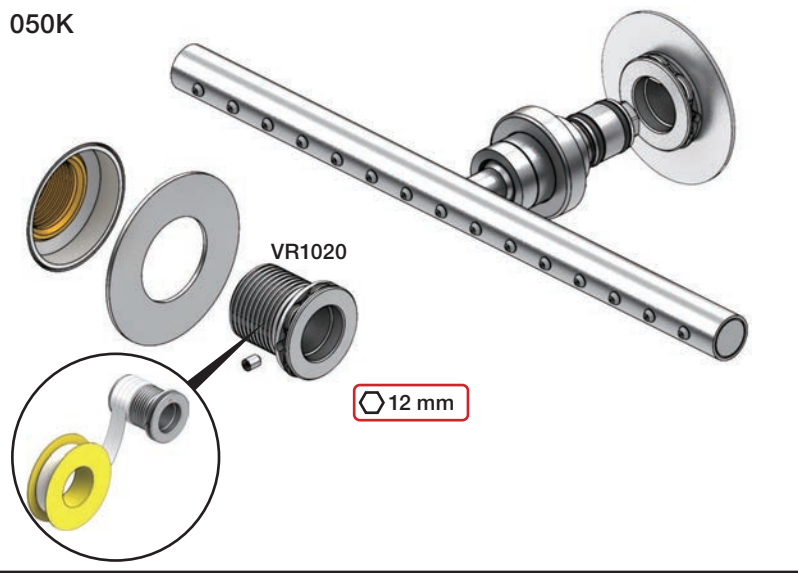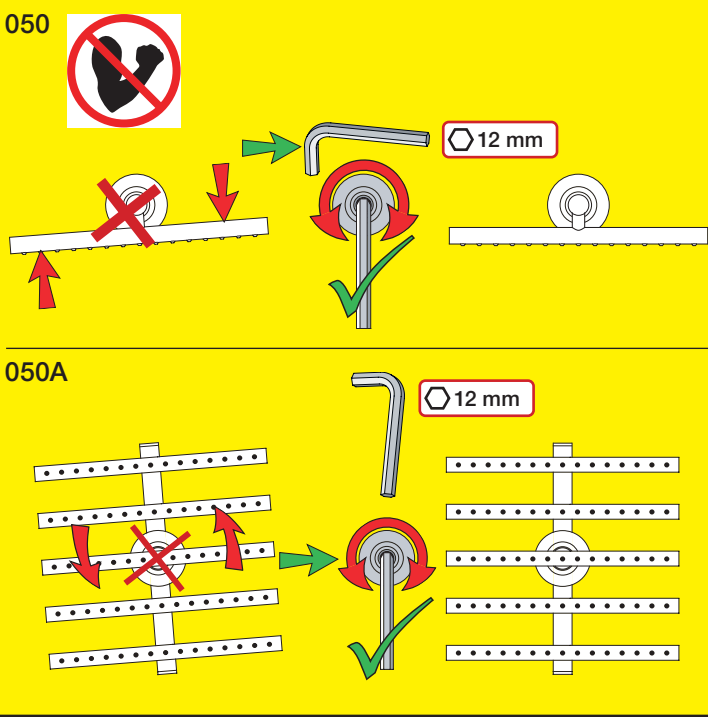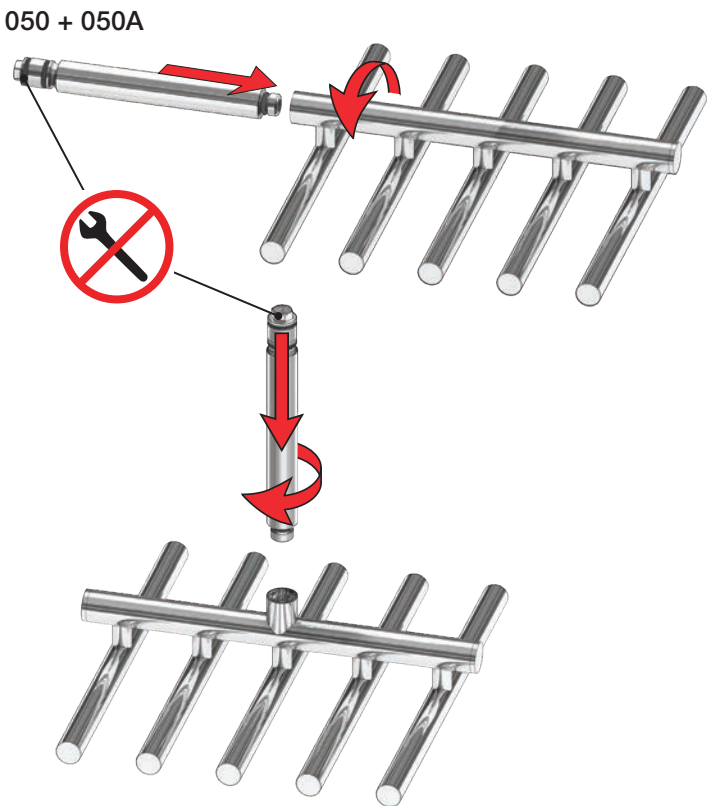

| Extension<br>Verlängerung        | Forlængerdele<br>Förlängning       | Verlengstukken<br>Modification                                         |
|----------------------------------|------------------------------------|------------------------------------------------------------------------|
| <b>T</b> Min. 3 mm<br>Max. 65 mm | <b>Y</b> Min. 48 mm<br>Max. 110 mm |                                                                        |
|                                  |                                    |                                                                        |
| T                                | Y                                  | VR2119 (VR1020): 050K<br>VR2021 (VR1020): 050<br>VR2219 (VR1021): 050A |
| 3 - 15 mm                        | 110 - 98 mm                        | Std.                                                                   |
| 15 - 25 mm                       | 98 - 88 mm                         | +10                                                                    |
| 25 - 35 mm                       | 88 - 78 mm                         | +20                                                                    |
| 35 - 45 mm                       | 78 - 68 mm                         | +30                                                                    |
| 45 - 55 mm                       | 68 - 58 mm                         | +40                                                                    |
| 55 - 65 mm                       | 58 - 48 mm                         | +50                                                                    |

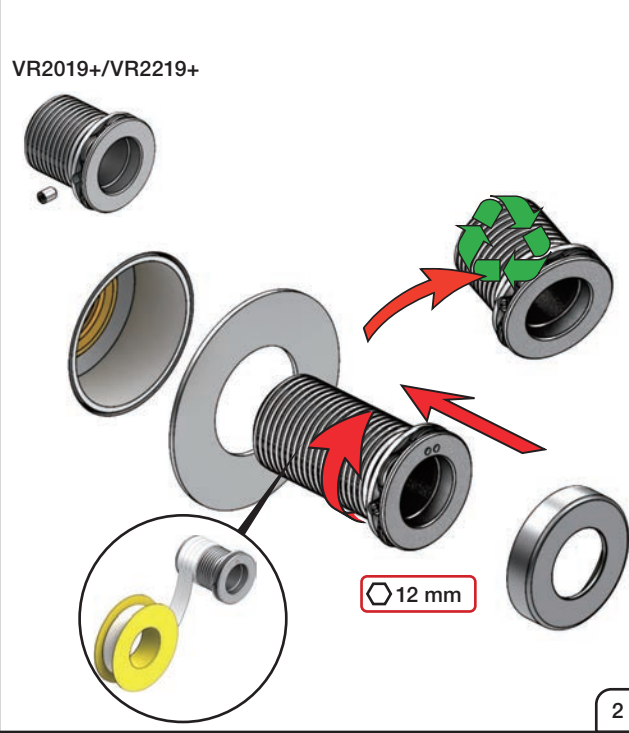

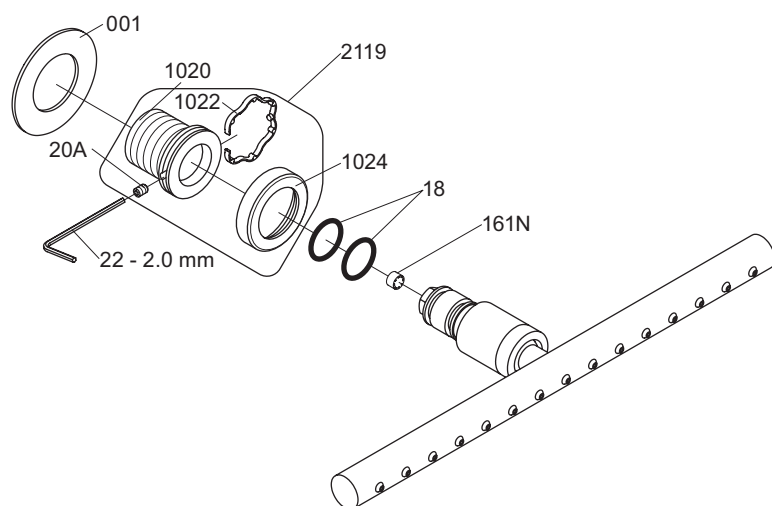

VR1020K: VR20A, VR22, VR1020, VR1022  
 VR2119: VR20A, VR22, VR1021, VR1022, VR1024



vola®

Lunavej 2  
 DK-8700 Horsens  
 Tlf : + 45 7023 5500  
 sales@vola.com  
 www.vola.com

**VOLA 050K**

Date  
 Apr. 21

Rev.  
 2

Sheet  
 SB 14.3