




A diagram of a curved metal pipe. One end has a large flange with a central hole. The pipe curves downwards and to the right, ending in a smaller flange. A third flange, identical to the one at the end of the pipe, is shown separately below the main assembly.

mnt_4900_V3_40998511
27-11-2023

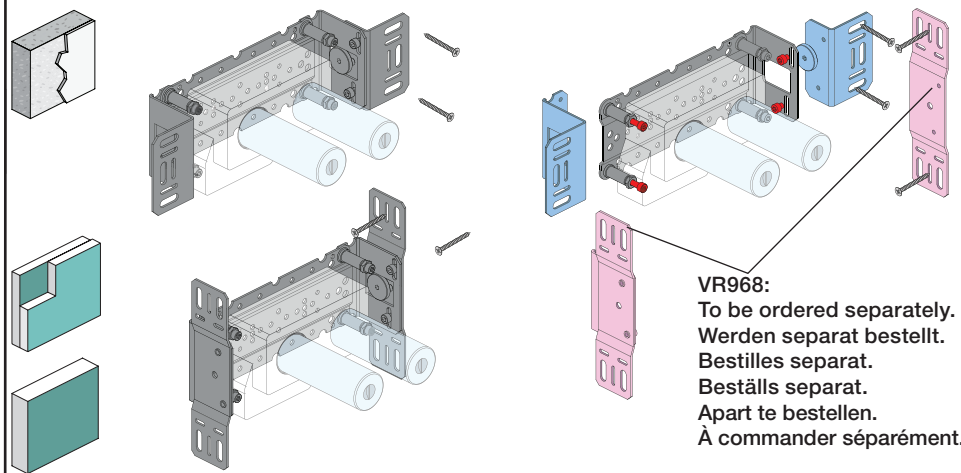

VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Beställs separat.
Apart te bestellen.
À commander séparément


A	Data, 3 Bar/43.5 Psi:		 Max. 65°C, 150°F
	l/min.	Gal/min.	
4300:	30.0	7.9	Max.: 10 Bar/145 psi
4800:	30.0	7.9	
4900:	18.3	4.8	

B Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter
Nazitten lokale regelgeving.
Vérifiez la législation locale.



  DE:
Bitte separat beiliegende Anleitung für die Schalldämpfer
VR1249 beachten

DE:
Bitte separat beiliegende Anleitung für die Schallentkopplung
VR972 beachten



D	Cabling	Kabelføring	Bekabeling		2
	Verkabelung	Kabeldragning	Câblage		

 = Ø10 - 1/2"

The diagram illustrates the connection of two different types of cables to their respective connectors. The top part shows a yellow cable being plugged into a circular connector with three pins. The bottom part shows a black cable being plugged into a rectangular connector with two pins.

4300/4800:


Alt.: 

Premixed water
Vorgemischte Wasser
Förblandet vand
Förblandade vatten
Voorgemengd water
D'eau prémélangée

4900:


[illegible]

- Extension
- Verlängerung
- Forlængerdele
- Förlängning
- Aanpassing
- Modification

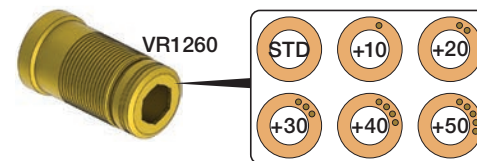

T Min. 15 mm
Max 65 mm

Y Min. 48 mm
Max. 110 mm



The diagram shows a cross-section of a standard extension cord. It is divided into three main sections: a blue 'STANDARD' section on the left, a yellow 'EXTENSION' section in the middle, and a red 'DO NOT REMOVE' section on the right. The yellow section is marked with extension lengths: +10, +20, +30, +40, and +50. A dimension line labeled 'Y' spans the entire length of the cord shown. Below the cord is a ruler with markings from 1 to 10.

	T	Y	VR1260/VR2019	VR513/
	3 - 15 mm	110 - 98 mm	Std.	Std.
	15 - 25 mm	98 - 88 mm	+10	x1
	25 - 35 mm	88 - 78 mm	+20	
	35 - 45 mm	78 - 68 mm	+30	x2
	45 - 55 mm	68 - 58 mm	+40	
	55 - 65 mm	58 - 48 mm	+50	

Fitting of extension
Montage von verlängerung




Montering af forlængerdele
Montering av förlängning

Montage van de verlengstukken
Montage des rallonges


VR1260+

VR2019+

VR513A

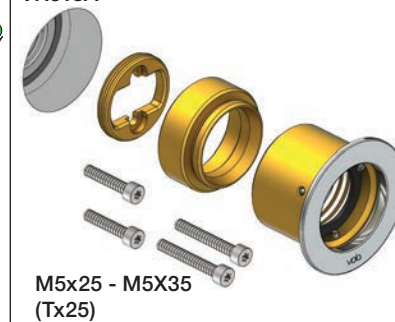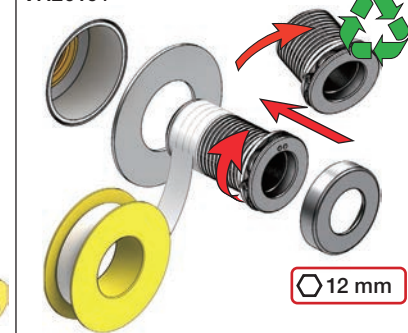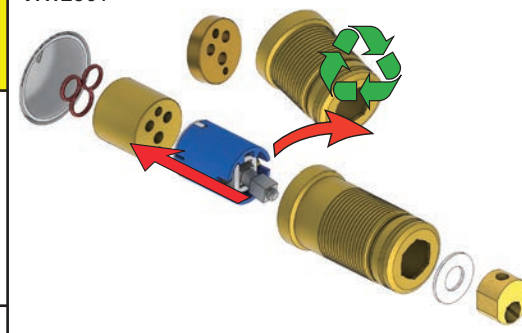


VR513A

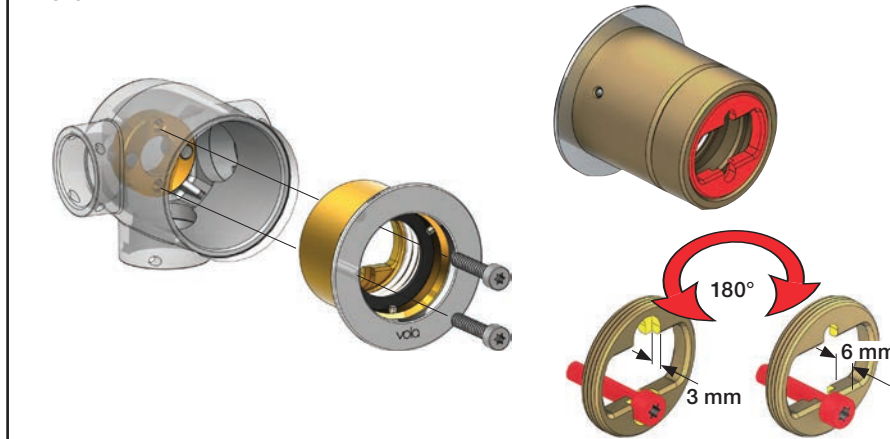


A: 10 - 20 mm = M5x25 






A: 20 - 29 mm = M5x35 



Box till inbyggnadsblandare.
Boks til indbygningsblander.
Laatikko seinäasenteiselle sekoittajalle.

Ingår inte i leveransen, köps separat.
Ikke inkludert, kjøpes separat.
Eivät sisälly tilaukseen, ostettava erikseen.

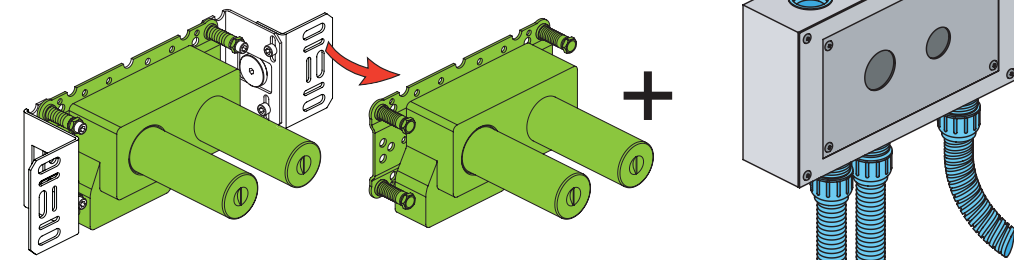

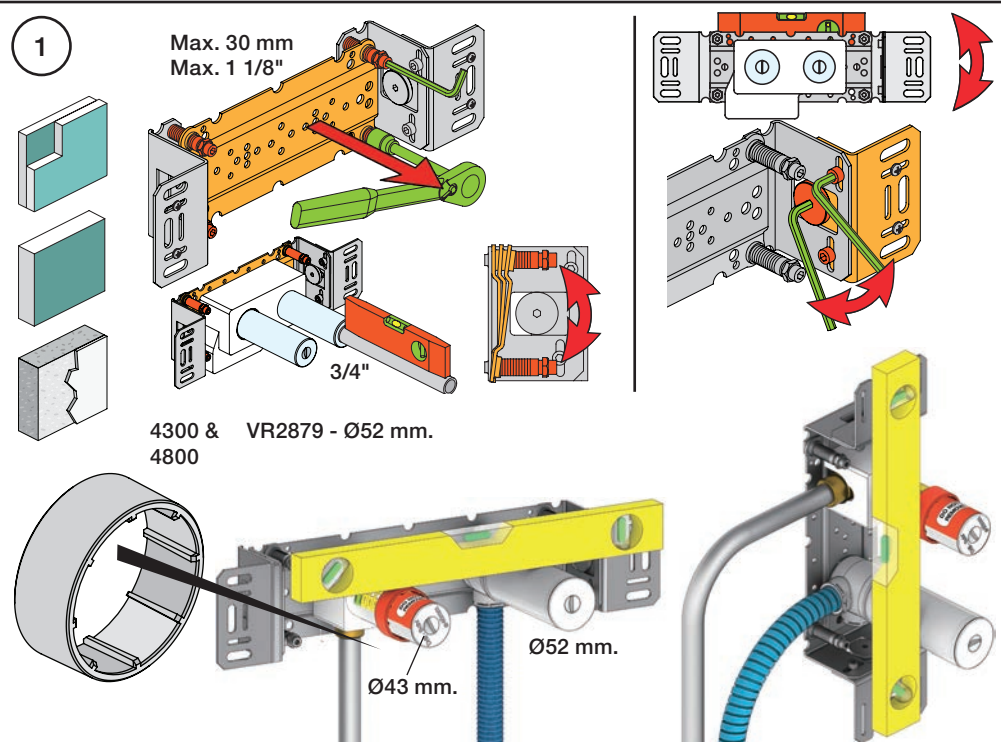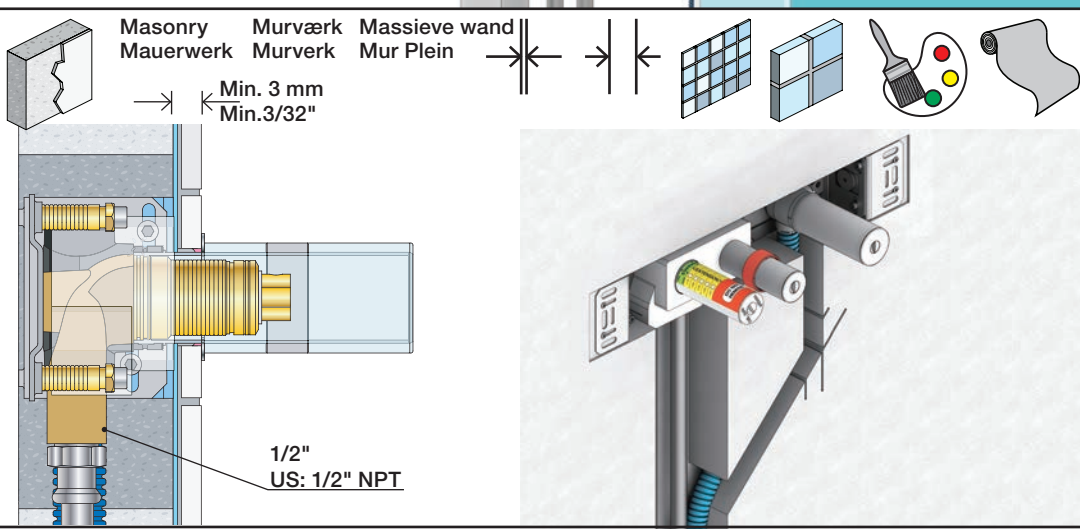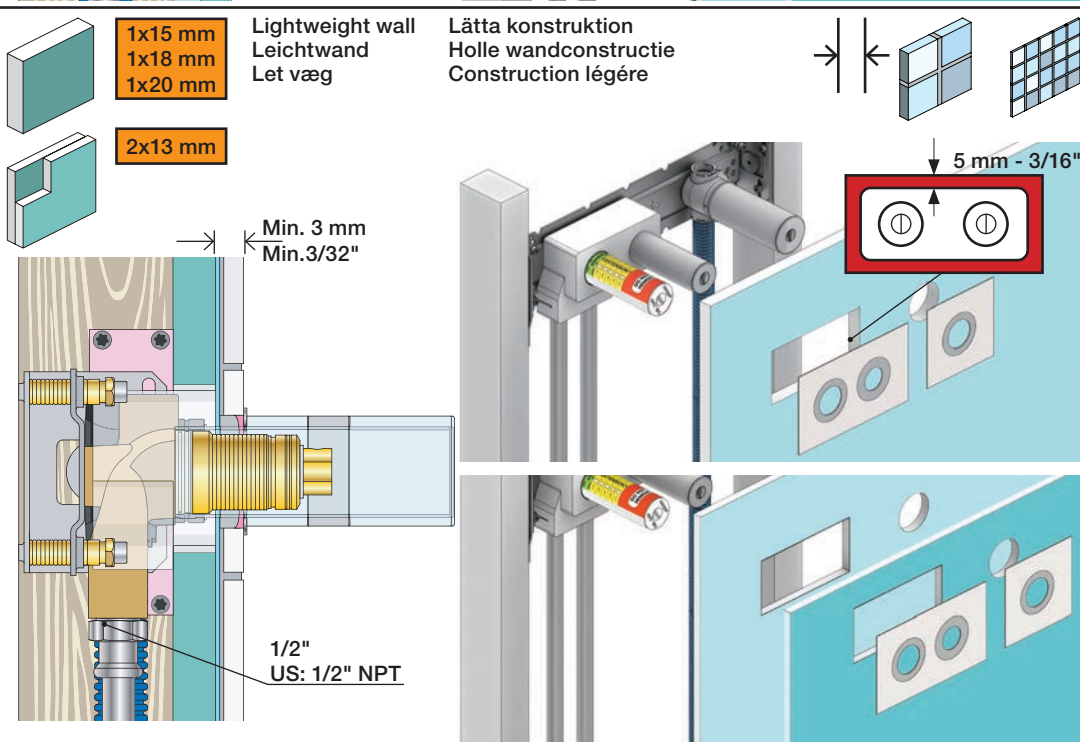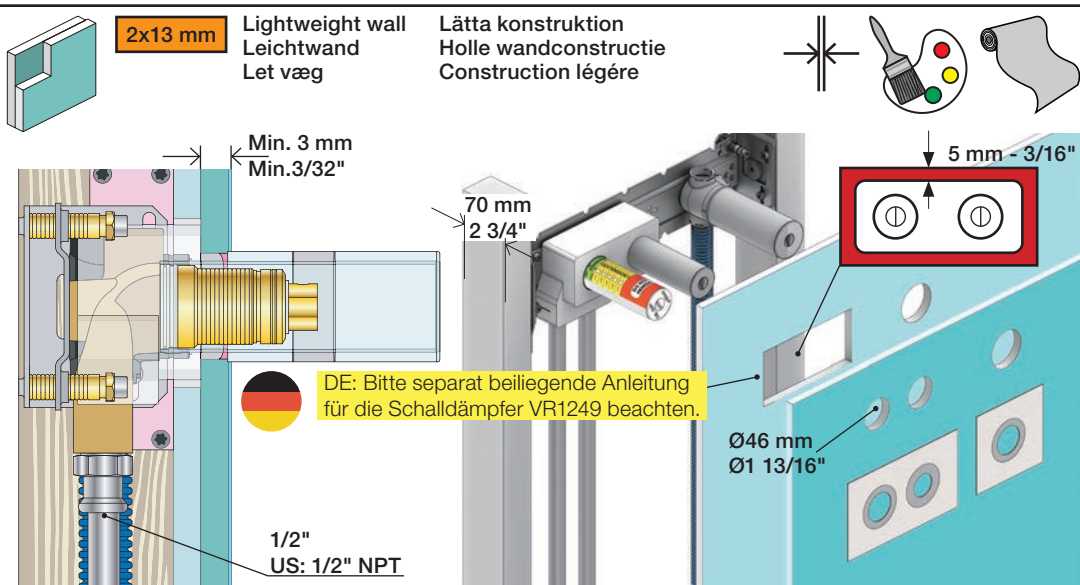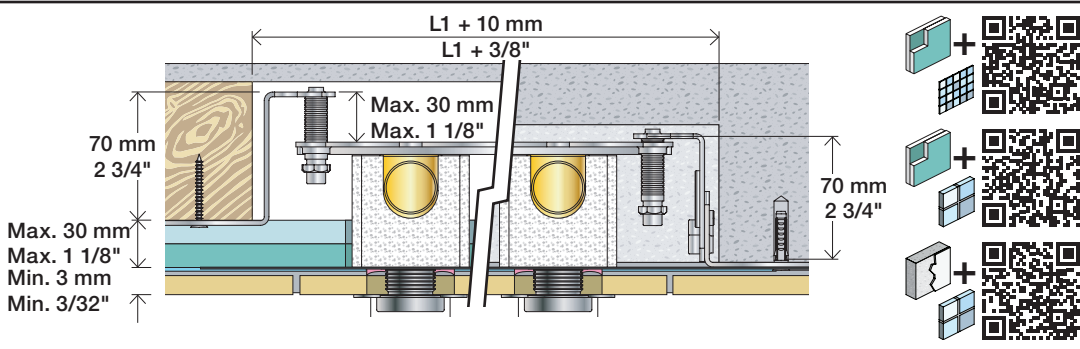

2

Test Pressure
Prüfdruck
testtryk
Test tryck
Test druk
test de pression

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter.
Nazitten lokale regelgeving.
Vérifiez la législation locale.

! Water - Wasser - Vand ! MAX 1 Minute - Minut !
! Vatten - Water - L'eau ! MAX 1 Minuut !

