

VOLA T60, T65, T68

Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage



T60:



T68:



T65:



www.vola.com

T60-T65-T68_V3_40998980
23-08-2023



1

T60

28 mm
1 1/8"

55 mm
2 1/8"

Ø17 mm
Ø11/16"

290 mm
11 3/8"

1500 mm
5'

G1/2"

28 mm
1 1/8"

Ø60 mm
Ø2 3/8"

Data	Bar:	1	2	3	4	5
T60	(l/min) (Gal/min)	6.9 1.8	9.8 2.6	12 3.2	14 3.7	15 4.1

Max. 65°C. 150°F

Service - VR556

Bathtub
Badewanne

Badekar
Badkar

Badkuip
Baignoire

2

T68

Ø43 mm
Ø1 3/4"

40 mm
1 5/8"

Ø6 mm
1/4"

25 mm
1"

001G

SILICONE

Min. 200 mm
Min. 8"

Min. 350 mm
Min. 14"

40 mm
1 5/8"

070

3

T65

50 mm
2"

55 mm
2 1/8"

Ø60 mm
Ø2 3/8"

50 mm
2"

790 mm
31"

690 mm
27 1/8"

590 mm
23 1/4"

490 mm
19 1/4"

900 mm
35 3/8"

800 mm
31 1/2"

700 mm
27 1/2"


600 mm
23 5/8"

1

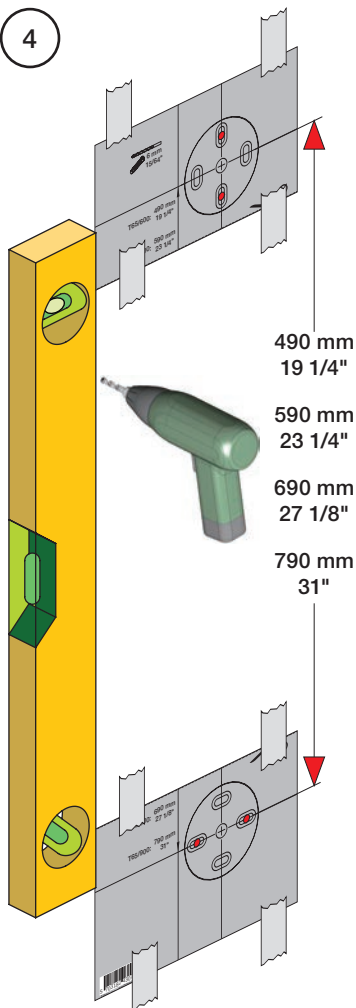
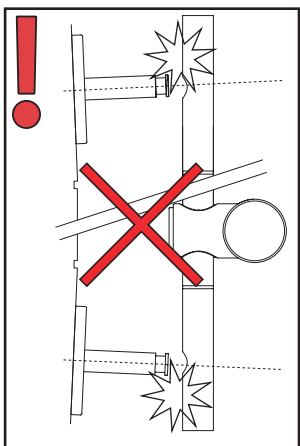


USA:
Max. flow rate:
1.6 Gal/min
6.0 l/min.


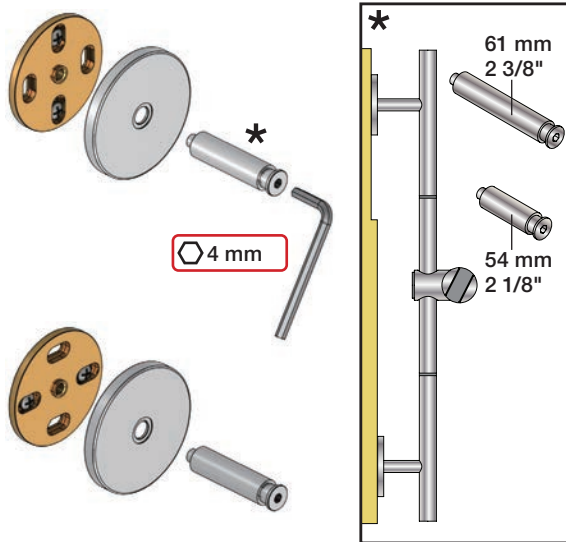
T8 ➡ T68



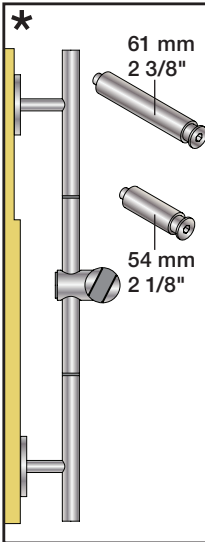
4

490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"

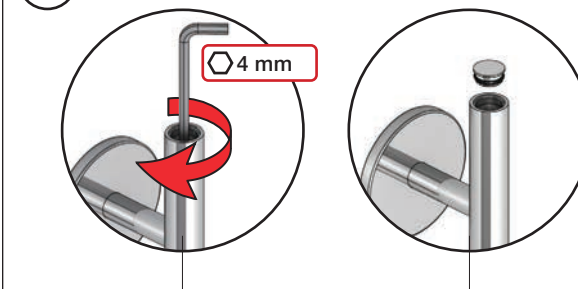
5

Ø6 mm
Ø15/64"24 - 42 mm
1" - 1 3/4"Ø54 mm
Ø2 1/8"

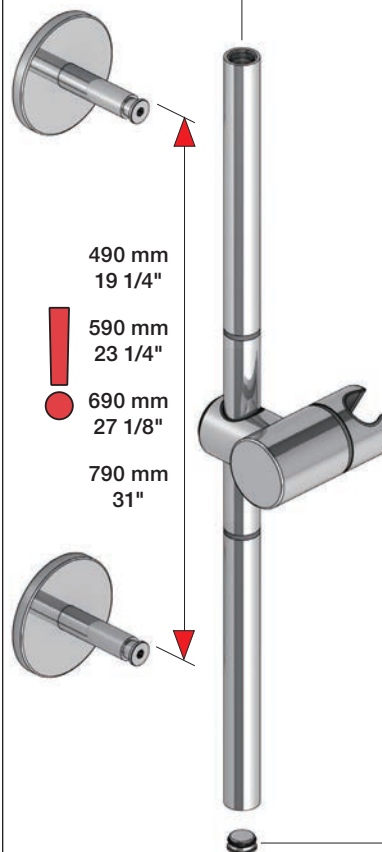
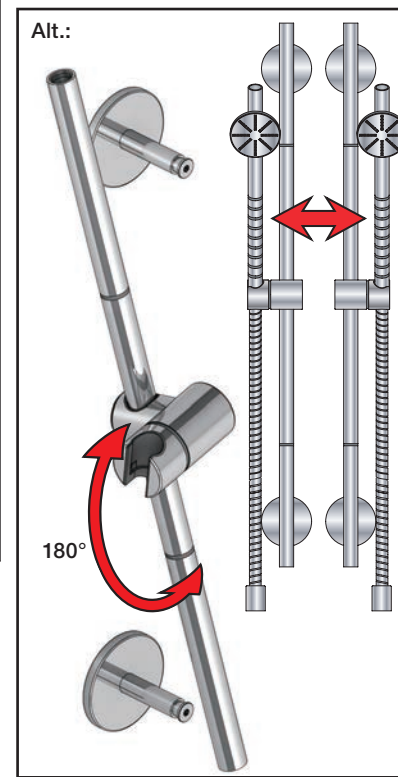
4 mm

61 mm
2 3/8"54 mm
2 1/8"

6



4 mm

490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"

Alt.:

180°

7



8

2 mm



